


NORMACLAMP® Quick Lock



Quick and easy installation

- ✓ Safe joint with the hose
- ✓ Clamping range from 25-40 up to 60-1300 mm
- ✓ Flexibility
- ✓ Smooth edges prevent damage to the pipe

NORMACLAMP® Quick Lock

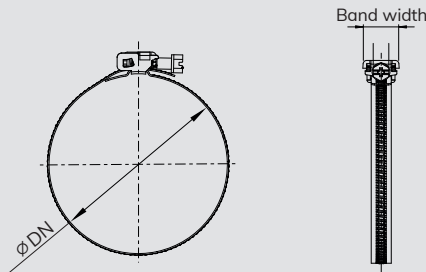

Applications

Quick Lock is well suited to applications involving poly and braided tubing that require a complete seal, e.g. for:

- Water industry
- Air conditioning
- Sanitary
- Construction

Materials

Group	W2B and W4
Band	W2B (SS – AISI 430) and W4 (SS – AISI 304)
Housing	W2B (Galvanized steel) and W4 (SS – AISI 304)

Band width (mm)	Description	Clamping range Ø DN (mm)	Part number		Packaging quantity (pcs)
			W2B	W4	
9	Quick Lock 25-45/9	25-45	0815 6120 045	–	100
9	Quick Lock 40-60/9	40-60	0815 6120 060	–	100
9	Quick Lock 60-90/9	60-90	0815 6120 090	–	50
9	Quick Lock 60-110/9	60-110	0815 6120 110	0815 6130 110	50
9	Quick Lock 60-135/9	60-135	0815 6120 135	0815 6130 135	50
9	Quick Lock 60-145/9	60-145	0815 6120 145	0815 6130 145	50
9	Quick Lock 60-170/9	60-170	–	0815 6130 170	50
9	Quick Lock 60-175/9	60-175	0815 6120 175	–	50
9	Quick Lock 60-215/9	60-215	0815 6120 215	0815 6130 215	50
9	Quick Lock 60-270/9	60-270	0815 6120 270	0815 6130 270	50
9	Quick Lock 60-325/9	60-325	0815 6120 325	0815 6130 325	50
9	Quick Lock 60-380/9	60-380	0815 6120 380	0815 6130 380	50
9	Quick Lock 60-425/9	60-425	0815 6120 425	0815 6130 425	50
9	Quick Lock 60-525/9	60-525	0815 6120 525	0815 6130 525	50
9	Quick Lock 60-660/9	60-660	0815 6120 660	0815 6130 660	50
12	Quick Lock 50-110/12	50-110	0815 6020 080		50
12	Quick Lock 50-130/12	50-130	0815 6020 090		50
12	Quick Lock 50-145/12	50-145	0815 6020 098		50
12	Quick Lock 50-165/12	50-165	0815 6020 108		50
12	Quick Lock 50-175/12	50-175	0815 6020 113		50
12	Quick Lock 50-215/12	50-215	0815 6020 133		50
12	Quick Lock 50-280/12	50-280	0815 6020 165		50
12	Quick Lock 50-325/12	50-325	0815 6020 188		50
12	Quick Lock 50-370/12	50-370	0815 6020 210		50
12	Quick Lock 50-425/12	50-425	0815 6020 238		50
12	Quick Lock 60-525/12	60-525	0815 6020 293		50
12	Quick Lock 70-625/12	70-625	0815 6020 348		50


Technical benefits

- ✓ Screw housing for easy tightening
- ✓ 'In-line' housing, which enables every thread on the worm to engage with the band
- ✓ Perforated band
- ✓ Safety buckle, keeping the band aligned

NORMACLAMP® Quick Lock is part of a broad portfolio. Discover more!



Hi-torque clamp

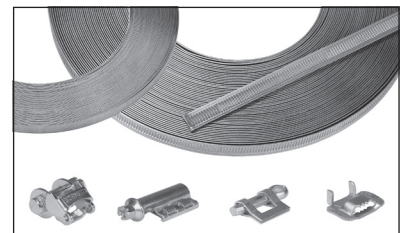

Normetta



Do you have questions or require a personal consultation?

Feel free to contact our NORMA Team! Tel.: +49 6181-403-0

Visit our website for more information about our products: www.norma-connects.com